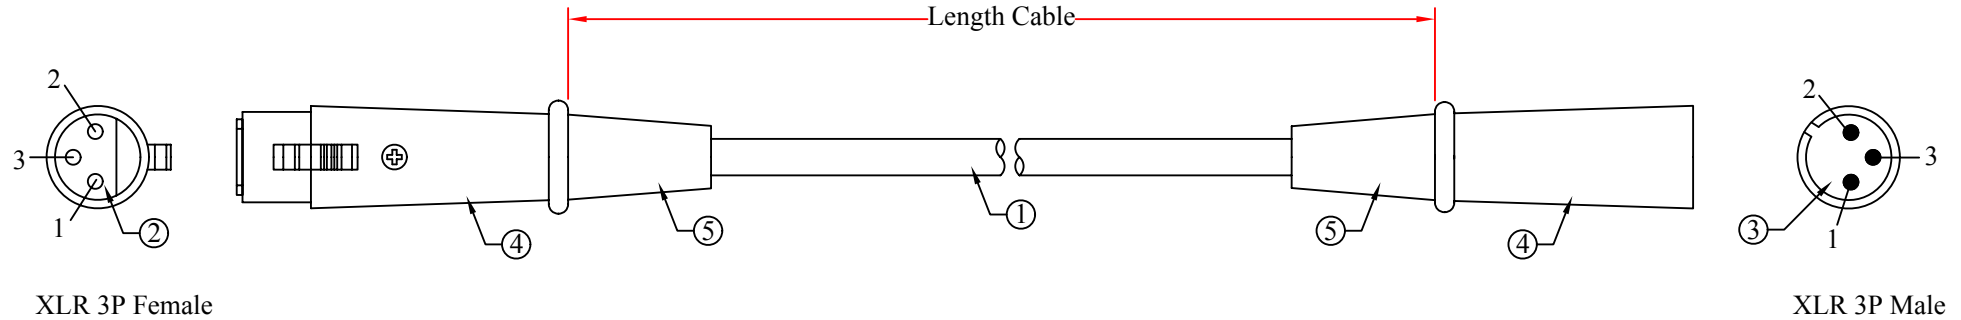


REV.	DESCRIPTION	DATE
A		05-2014



RoHS

Pin Assignment	
XLR 3P Female	XLR 3P Male
3	3
2	2
1	1
Shell	Shell

NOTES:




1.Electrical Test:

(1)100% Open Short & Miswire Test.

(2) Conductor Resistance: DC 300V 5ohm MAX

PART NO.	CABLE LENGTH
10XR-01206	6 FT
10XR-01210	10 FT
10XR-01215	15 FT
10XR-01225	25 FT
10XR-01250	50 FT
10XR-012HD	100 FT

5	Black PVC
4	Metal:Nickel Plated
3	XLR 3P Male
2	XLR 3P Female
1	Cable: 2C x 24AWG (7/0.20 BC)+ Spiral (28/0.10TC), OD:6.0mm, Black Outer PVC Jacket
NO.	SPECIFICATIONS
BOM LIST	

ITEM NUMBER	10XR-012xx			DRAWER	JL
TITLE	XLR 3P Male to XLR 3P Female Audio Cable			CHECKED	
				APPROVED	
MATERIAL		SCALE			
REV.	A	UNIT	INCH		
DRAWING NO:	108				
NO.(ID)					